









0 mm

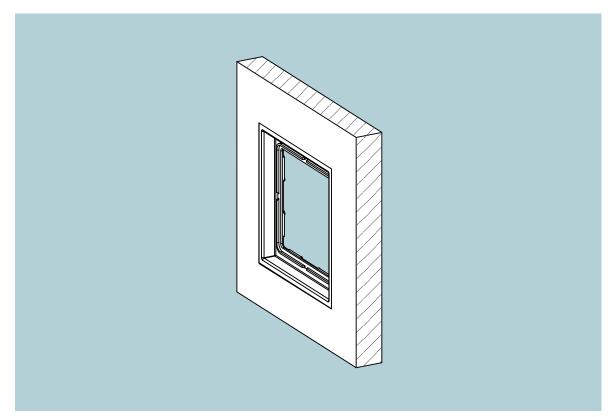

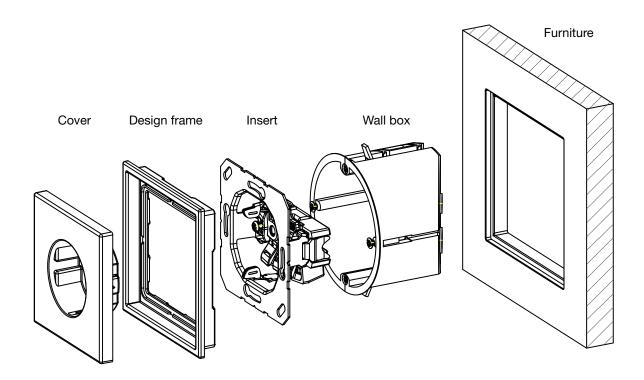


The flush mounting installation requires a minimum panel thickness of 13 mm. The supporting frame contact surface must be generated smooth and flat. Subsequently the cut out has to be sealed with a suitable sealing in order to avoid a swelling of the furniture.




0 mm

1-gang frame installation:

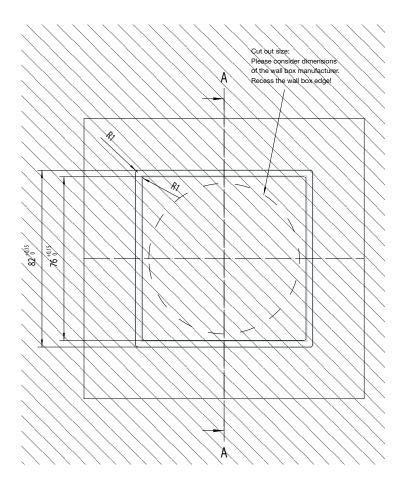


A-A






0 mm

2-gang frame installation:

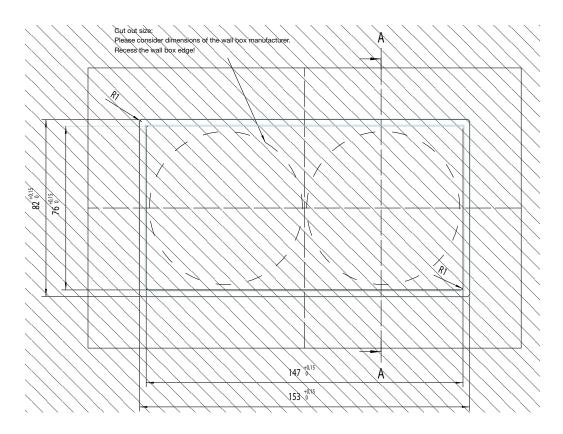







0 mm


3-gang frame installation:

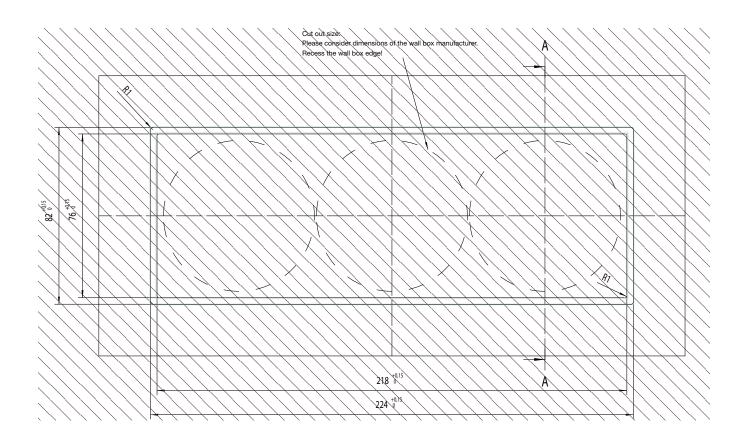






3 mm

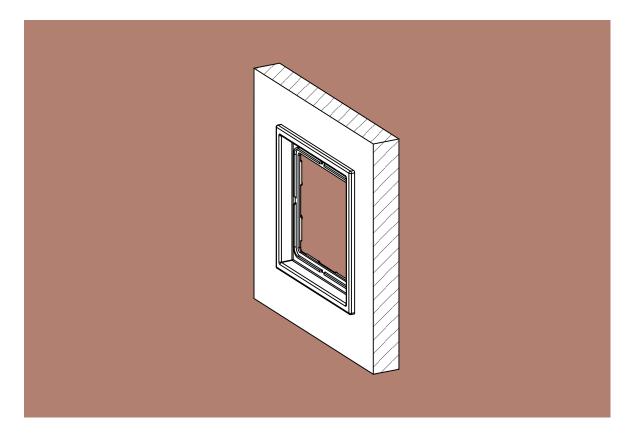

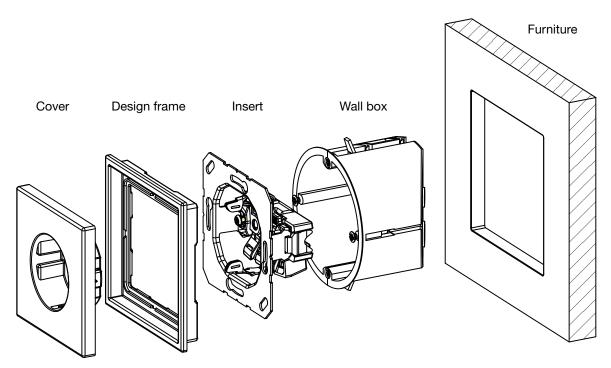



The flush mounting installation requires a minimum panel thickness of 13 mm. The supporting frame contact surface must be generated smooth and flat. Subsequently the cut out has to be sealed with a suitable sealing in order to avoid a swelling of the furniture.



3 mm

1-gang frame installation:

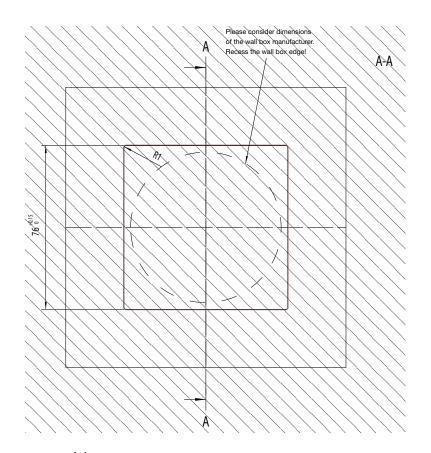






3 mm

2-gang frame installation:

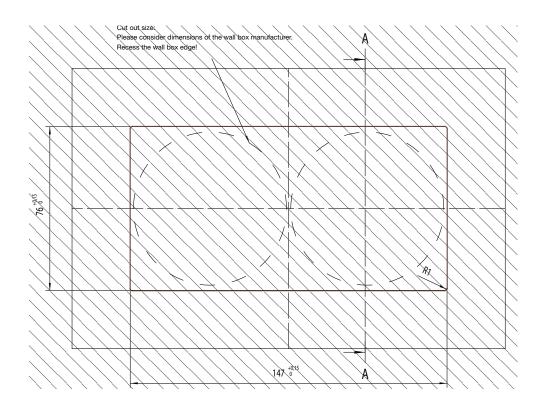

A-A Visible side Supporting frame contact surface



3 mm

3-gang frame installation:

